
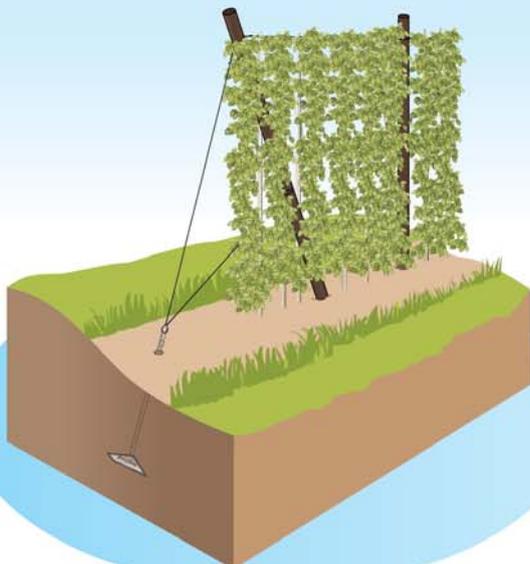
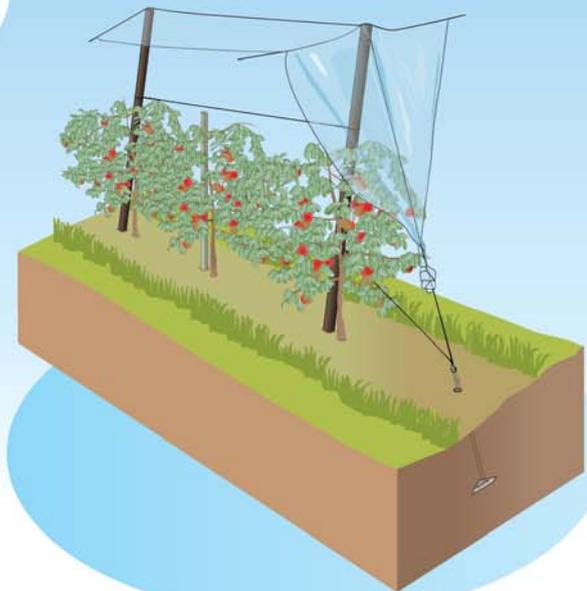
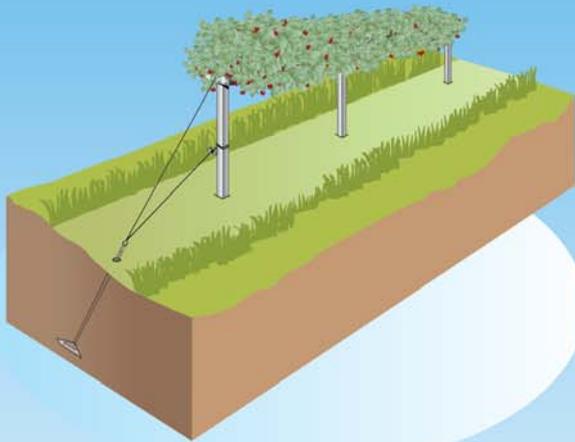
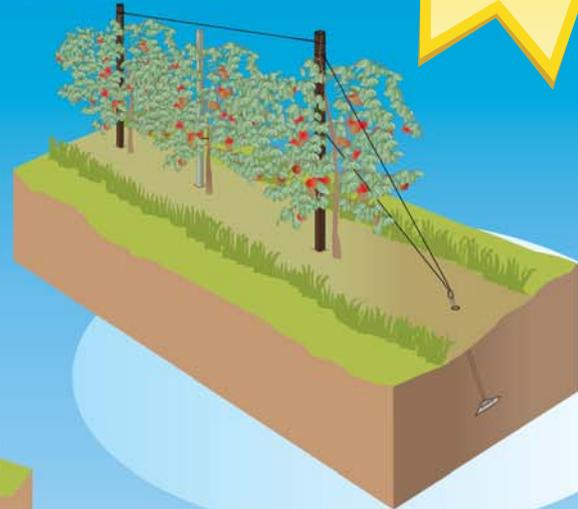


EARTH ANCHORING SYSTEMS FOR VINEYARDS, ORCHARDS, HOPS, SOFT FRUIT & CROP PROTECTION APPLICATIONS

NEW!
STAINLESS STEEL
ANCHOR SYSTEM
& RANGE OF
END POST KITS

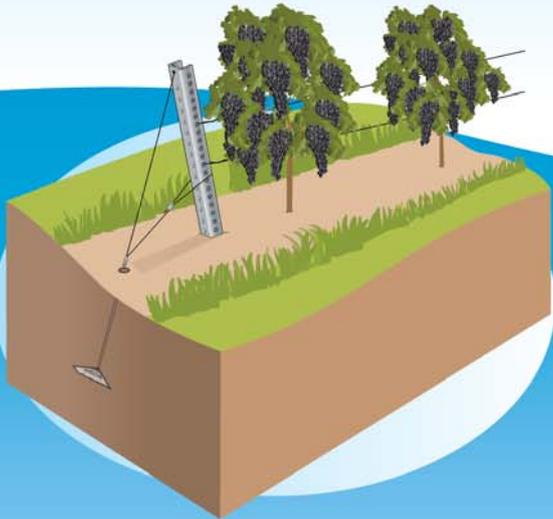

PLATIPUS
EARTH ANCHORING SYSTEMS

INTRODUCTION



Platipus Anchors are market leaders in the design, manufacture and supply of Percussion Driven Earth Anchoring Solutions (PDEA's) for a wide range of market sectors. Founded in 1982, Platipus is renowned for providing some of the most innovative and cost effective anchoring solutions for the Civil Engineering, Landscape and, more recently, the Vineyard and Fruit Growing Industries.

TYPICAL FAILURES



Technology in the vineyard and fruit growing industry improves almost with every harvest. The anchoring point for any trellis or crop protection system, light or heavy, is usually the most important part of the structure, particularly when the fruit is ripening and the canopy is at its largest. Without a secure reliable anchor point the result could be catastrophic and costly.

APPLICATIONS



Vineyards



Orchards



Hops



Table-top



Crop Protection

BENEFITS OF THE PLATIPUS ANCHORING SYSTEM

- Over 30 years experience
- A simple effective design & concept
- High grade heat treated aluminium alloy anchor head
- Unique anchor head design ensures installation in most compacted soils, including chalk
- Superior strength stainless steel solid wire with unique connection
- Fast and easy installation
- Immediate quantifiable loads, if required
- High performance standard anchor systems with an ultimate load up to 2000kg / 4000lbs, subject to soil conditions
- Up to 25 year anchor system design life in balanced neutral soil
- Ideal for new establishments or general maintenance
- A cost-effective alternative to traditional anchoring techniques






General Maintenance







New Establishment

HOW A MECHANICAL ANCHOR WORKS

There are three steps to the installation of an anchor system:

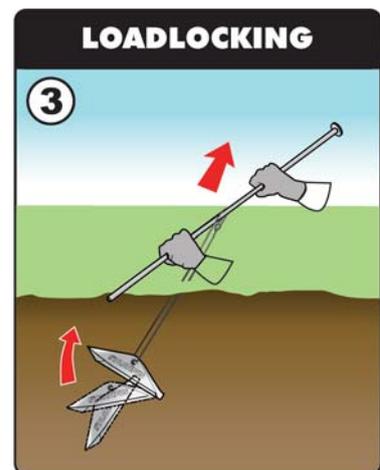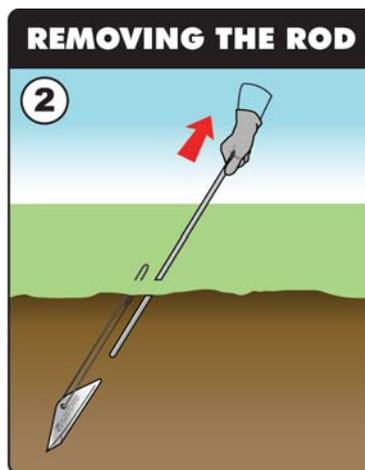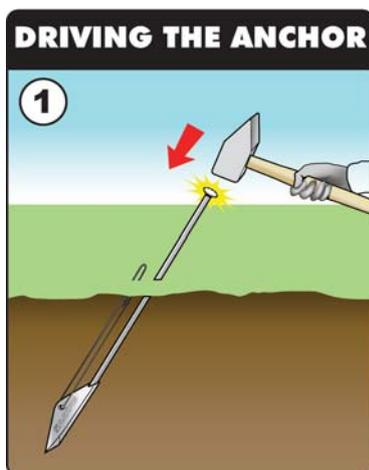

TYPICAL ANCHOR BEHAVIOUR

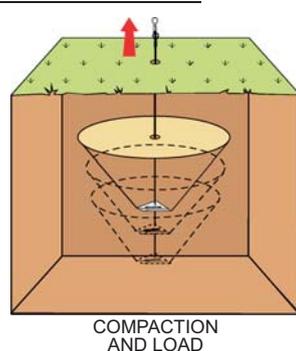

THE ANCHORING SYSTEM



S4 / S6 / S8

The Anchor - The unique design of the Platipus anchor means it can be rapidly deployed in most compacted soils, including chalk. It's chisel drive point and streamlined shape make installation easy, in most cases, using simple hand or power tools.

It is made of a high grade aluminium alloy which is specially heat treated to provide maximum strength and corrosion resistance. Available in a variety of sizes to suit all load requirements; the Platipus anchor is the perfect solution for trellising, soft fruit and crop protection applications.



Stainless Steel Wire

The Wire - The wire is made of a superior grade of stainless steel. It's construction and high strength characteristics mean that it can outperform any flexible or solid strand galvanised wire tendon of an equal diameter.

Available in standard 3mm / 0.12" and 3,5mm / 0.14" diameter sizes it has a unique 'patented' connection which makes anchor system assembly quick and easy.



S6V1S / S4V1S

The Platipus Anchoring System - By using high quality products we are able to deliver a range of standard anchoring systems with a design life up to 25 years in a balanced neutral soil. Using conventional installation equipment, they can be proof tested to an exact holding capacity and made fully operational immediately. The standard **S4V1S** has an ultimate load of 1000kg / 2000lbs while the **S6V1S** has an ultimate load of 2000kg / 4000lbs, depending on soil conditions.

The anchoring systems perform exceptionally well in granular soils, stony ground and most chalks, often allowing a smaller size of anchor to be used. In weaker cohesive soils, like soft alluvial clays, a larger anchor may be needed.

Approximate Anchor Capacities			
Soil type	Soft	Medium	Hard
SPT / CPT*	0 - 10	10 - 30	30+
Shear angle	0 - 30°	30 - 38°	38°+
Anchor			
S4	0 - 300kg 0 - 600lbs	300 - 600kg 600 - 1200lbs	600 - 1000kg 1200 - 2000lbs
S6	0 - 500kg 0 - 1000lbs	500 - 1000kg 1000 - 2000lbs	1000 - 2000kg 2000 - 4000lbs
S8	0 - 1000kg 0 - 2000lbs	1000 - 2000kg 2000 - 4000lbs	2000 - 3000kg 4000 - 6000lbs

*SPT = Standard Penetration Test CPT = Cone Penetrometer Test

END POST KITS (EPAK)

To complement our range of high performance anchoring systems we can offer a selection of simple end post kits for metal / wooden posts to suit all budgets. The kits come complete with a pre-cut length of flexible galvanised wire tendon suitable for either single or double-leg connections, an end stop termination and a choice of tensioning devices.

For premium applications we can offer the Revolution tensioner. Made from a superior grade of stainless steel it is designed with simplicity in mind. Installation requires only a 13mm / 0.51" spanner or socket for tensioning. Apart from the design life one of the main advantages of this tensioner is that it can be reused time and time again.

For situations with a limited budget we can offer a range of simple tensioners made from 100% metal providing excellent strength and durability. The tensioners require a simple tensioning tool for installation and when combined with Platipus 3mm / 0.12" and 4mm / 0.16" diameter high strength galvanised wire delivers an ultimate load of 400kg / 880lbs and 600kg / 1320lbs respectively.



End Post Kit with Revolution Tensioner

End Post Kit with Simple Tensioners

VINEYARDS



Popular grape varieties are often established on compacted soils and chalk. A high quality grape also requires high quality trellising and secure anchor points.

The Platipus **S4V1S** and **S6V1S** anchoring systems are ideal for vineyard trellising. Both systems will match the design life of most trellising and have an ultimate holding capacity of up to 1000kg / 2000lbs and 2000kg / 4000lbs respectively, depending on soil conditions. The unique anchor design makes installation into the hardest chalk easy, allowing over 300 anchors to be installed in one day when using the correct equipment.



ORCHARDS & HOPS



Larger fruits and heavier flowering plants, such as apples and hops, often use taller trellising, longer rows and produce a more intense crop. This means that a more substantial anchoring point is generally required.

The S6 and S8 anchor systems are perfectly equipped to handle a potential increase in load. Compatible with a variety of stainless steel solid wire diameters we are able to offer a number of different solutions to suit individual design life and load requirements.



SOFT FRUIT



Table-top trellis systems are fast becoming the preferred method for growing soft fruits, such as strawberries. It offers a number of benefits over traditional bed grown techniques. Raising the plant helps protect it against frost and disease, it makes it easier and faster to pick and can also increase the yield.

The load generated by table-top fruit can increase significantly during the growing season. Choosing the correct anchor system to support growth is a vital consideration. The **S4V1S** and **S6V1S** have an ultimate holding capacity of 1000kg / 2000lbs and 2000kg / 4000lbs respectively, depending on soil conditions, and are perfect for table-top trellis systems.



CROP PROTECTION



Protective solutions like polytunnels, shade fabric, bird and hail netting have revolutionized soft fruit production.

Although these lightweight materials can remove weather dependence and improve production they can also act as a large sail area when exposed to strong winds, putting additional stress on the structure.

The correct choice of anchor system is crucial to the structures' overall stability. The S6 and S8 anchors are ideal for this type of situation and when combined with the high strength stainless steel solid wire we can provide a range of solutions to suit all load requirements.




INSTALLATION TOOLS

Basic tools are essential in the installation process. Other pieces of equipment make the general procedure easier and faster. Where multiple anchor installations are required we recommend using powered equipment to install the anchors.



ANCHOR	DRIVE RODS	ROD REMOVERS	LOADLOCKING
S4	HDRS4ED / PDRS4ED	RR1	PH1
S6	HDRS6 / PDRS6	RR1	PH1
S8	HDRS8 / PDRS8	RR1	SJ1

All our tools have been tried and tested over many years. A full twelve month replacement warranty is offered (subject to inspection) should any tool fail during the normal installation process.

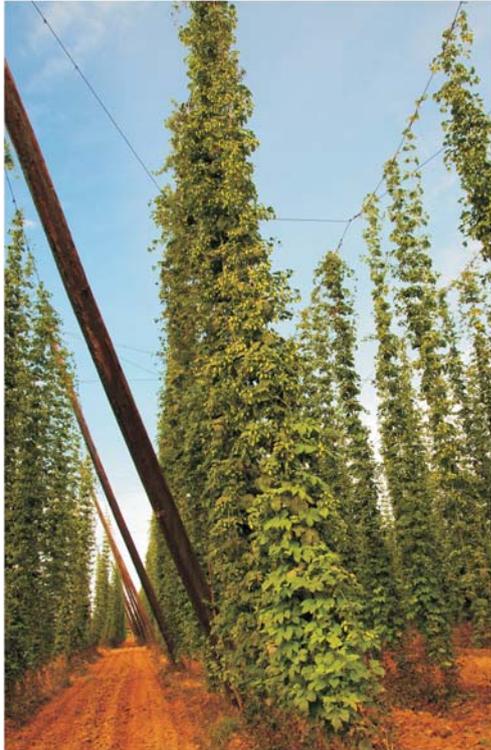

Platipus Anchors technology is protected by Worldwide Patents, Trademarks and Registered Copyright.

060712

Platipus Anchors technology is protected by International Patents, Trademarks and Registered Copyright.



Platipus Anchors Limited,
Kingsfield Business Centre, Philanthropic Road,
REDHILL, Surrey, RH1 4DP, England.
T: +44 (0) 1737 762300
E: info@platipus-anchors.com

Platipus Anchors Inc,
1902 Garner Station Boulevard,
Raleigh, NC 27603, USA.
T: 866 PLATIPUS (752 8478) T: (919) 662 0991
E: usacivils@platipus-anchors.us